



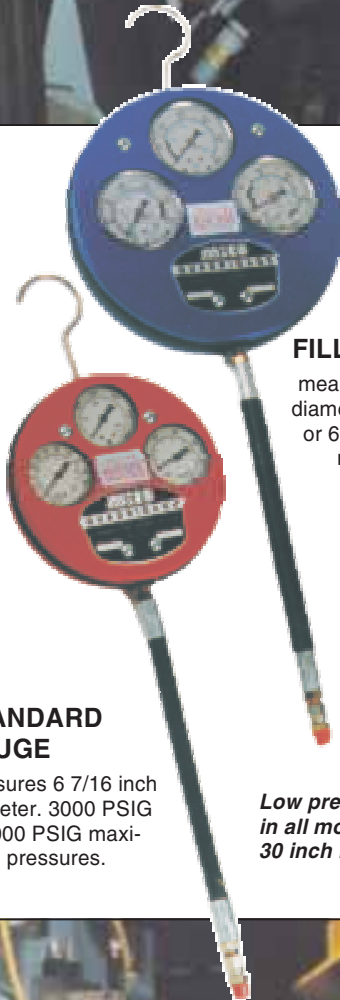

Quadrigages

Pressure testing devices
for hydraulic, air, and
vacuum systems

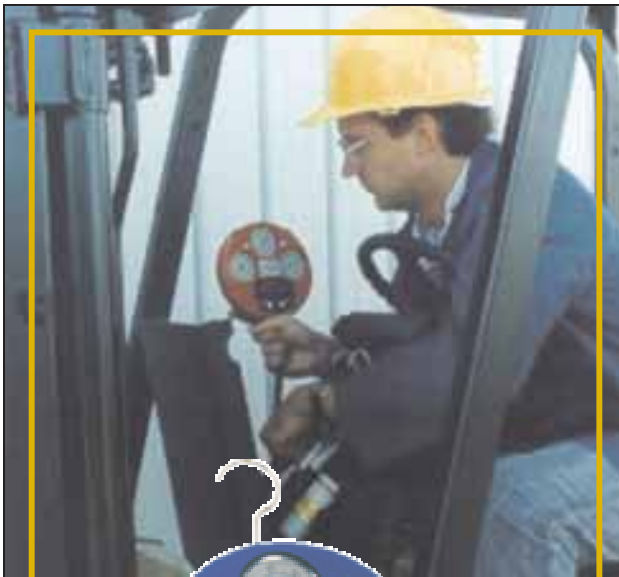

GLYCERIN FILLED GAUGE

measures 8 3/8 inch
diameter. 4000 PSIG
or 6000 PSIG maxi-
mum pressures.

STANDARD GAUGE

measures 6 7/16 inch
diameter. 3000 PSIG
or 5000 PSIG maxi-
mum pressures.

*Low pressure gauge
in all models reads to
30 inch Hg vacuum.*



FEATURES

- ✘ Performs four gauge functions
- ✘ Read in lb·in² (PSIG) and kg/cm² (bar)
- ✘ Case is dust and moisture resistant
- ✘ Compact for tool box storage
- ✘ Available with 12 or 36 inch pressure hoses and 1/8 inch NPTF male fitting
- ✘ Includes bleeder screw and convenient hanger
- ✘ Built-in pressure sensor protects low range gauges from high pressure
- ✘ Compatible with most hydraulic fluids
- ✘ Continuous system pressure readings are possible through pressure ranges of 0-3000 PSI, 0-4000 PSI, 0-5000 PSI or 0-6000 PSI


CONNECTING QUADRIGAGE

The MICO QUADRIGAGE swivel fitting may be connected to any accessible gauge outlets in the system to be tested. If the system is not equipped with gauge outlets then connect to an outlet in the system, such as a bleeder fitting. If there are no outlets, a female branch tee fitting may be installed at any point in the line where a pressure reading is wanted.

LOW PRESSURE GAUGE
Reads 0-150 PSIG or 0-300 PSIG depending on model selected. Also reads to 30 inches of HG vacuum.

HIGH PRESSURE GAUGE
Reads 0-3000 PSIG, 0-4000 PSIG, 0-5000 PSIG or 0-6000 PSIG depending on model selected.

MIDRANGE PRESSURE GAUGE
Reads 0-600 PSIG or 0-1000 PSIG depending on model selected

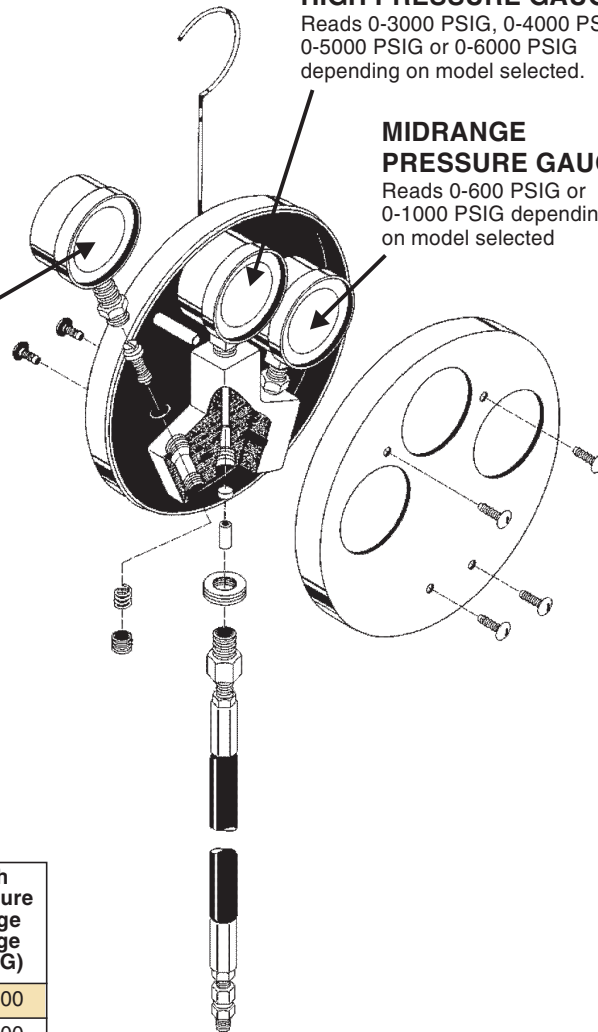

ORDERING INFORMATION

Model Number	Gauge Type	Hose Length (inches)	Low Pressure Gauge* Range (PSIG)	Medium Pressure Gauge Range (PSIG)	High Pressure Gauge Range (PSIG)
02-740-011	Standard	12	0-150	0-600	0-3000
02-740-016	Standard	12	0-150	0-600	0-5000
03-740-006	Standard	36	0-150	0-600	0-3000
03-740-019	Standard	36	0-150	0-600	0-5000
12-740-006+	Glycerin Filled	12	0-300	0-1000	0-6000
12-740-008+	Glycerin Filled	36	0-300	0-1000	0-6000
12-740-011+	Glycerin Filled	36	0-300	0-1000	0-4000

* Also reads to 30 inches of Hg vacuum

+ Not recommended for unpressurized airfreight shipments.

METRIC CONVERSION: 1 PSI = 0.06895 bar

MICO is a registered trademark of MICO, Inc. MICO is registered in the U.S. Patent and Trademark Office as well as in Australia, Indonesia, Japan, Peoples Republic of China, South Korea, and the European Community.



MICO, Incorporated

1911 Lee Boulevard

North Mankato, MN U.S.A. 56003-2507

Tel: +1 507 625 6426 Fax: +1 507 625 3212

DISTRIBUTED BY: