




Service Instructions

● Items included in Fitting Kit 4071210192

NOTE: O-rings (2) are to be used for Brake Fluid applications only. Do not use in applications that use Hydraulic Oil.

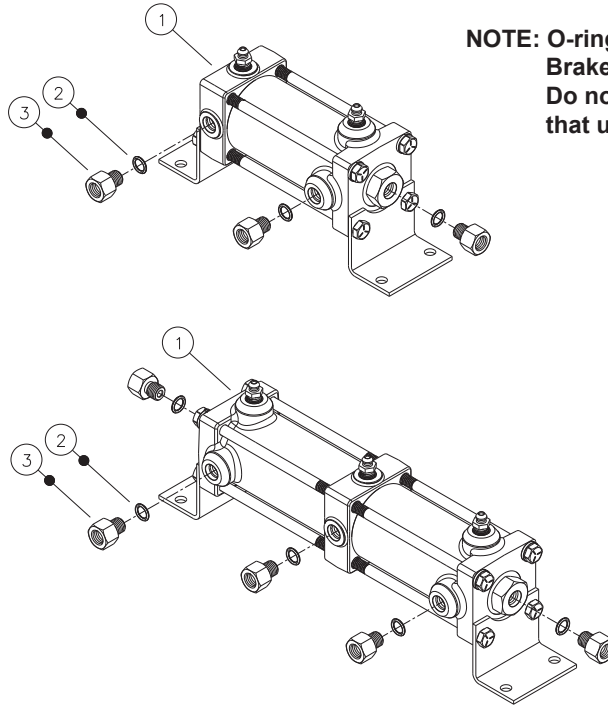

INSTRUCTIONS

1. Remove fittings (3) from actuator (1) and discard.
2. Install new o-rings (2) on fittings (3). Install fittings (3) in actuator (1) and torque 13.6-20.3 N·m (10-15 lb·ft).

This publication is not subject to any update service. Information contained in this publication was in effect at the time the publication was approved for printing and is subject to change without notice or liability. ZF Off-Highway Solutions Minnesota Inc. reserves the right to revise the information presented or to discontinue the production of parts described at any time.



ZF Off-Highway Solutions Minnesota Inc.

1911 Lee Boulevard / North Mankato, MN U.S.A. 56003

Tel: +1 507 625 6426 **Fax:** +1 507 625 3212