


LOAD CAPACITY @ 100 RPM AND B10 = 6,500 HRS 325 RPM AND B10 = 2,000 HRS

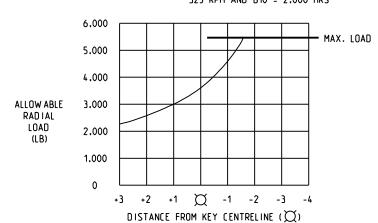

(INCHES)

<u>INCH</u> [MILLIMETER]

North Mankato, Minnesota USA

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC CLAIMS PROPRIETARY RIGHTS TO INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL | THE MATERIAL DISCLOSED IN THIS DOCUMENT. USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR THIS DOCUMENT IS PROVIDED IN CONFIDENCE DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF AND MAY NOT BE REPRODUCED OR DISCLOSED COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC.

AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED. | COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

	·					
0	SCALE 0.500	TITLE WHEEL ADAPTER				
E D		APVD PROD ENGRG PJS 2011-08-09	SIZE	DRAWING		REV
).	X NO x6419	APVD ENGRG BLF 2011-08-08	В	13-587-022 CUSTOMER COPY		,C

NOTES:

BEARING REPAIR KIT P/N 12-501-303
 DIMENSIONS MAY VARY BETWEEN UNITS AND ARE FOR REFERENCE PURPOSES ONLY. MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES

SPECIFICATIONS:

1.100 LB. MAX. e 100 RPM AND 2.000 HRS. B₁₀ LIFE. (BASED ON CONSTANT 2.900 LB. SIDE LOAD AT ⊄ OF KEY.) THRUST LOAD CAPACITY:

APPROXIMATE WEIGHT:

FORM NO 89-500-276 06-OCT-2003