


B | ECN000115

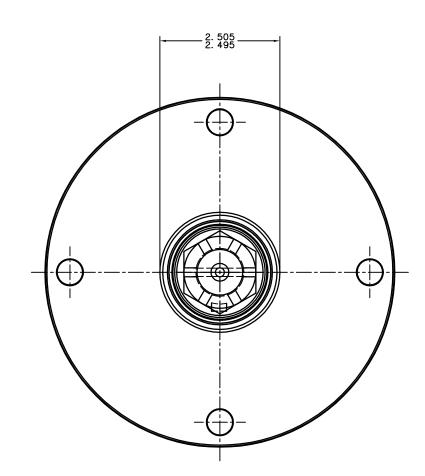

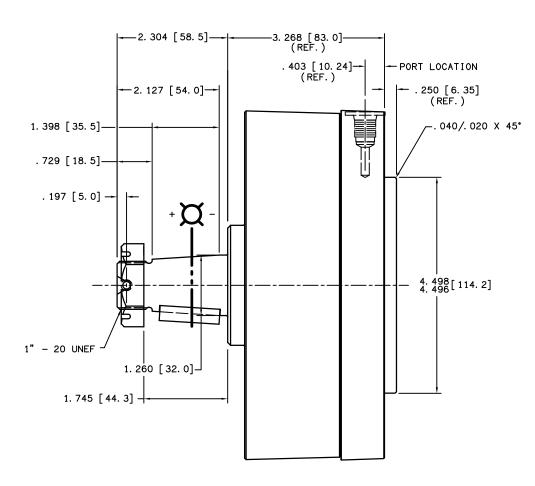

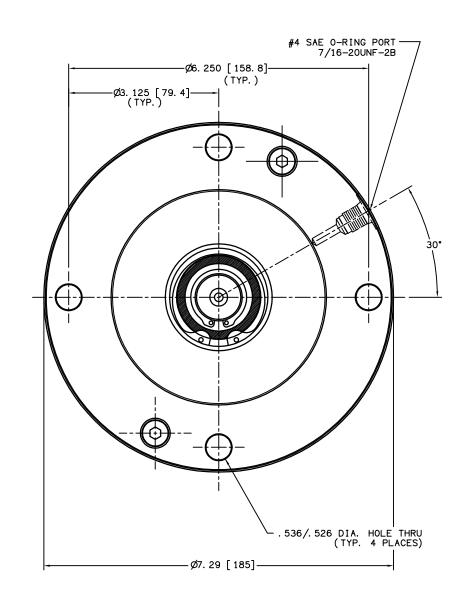

## NOTES:

- 1) REPAIR KIT P/N 12-501-428
- 2) DIMENSIONS MAY VARY SLIGHTLY BETWEEN UNITS AND ARE TO BE USED FOR REFERENCE PURPOSES ONLY.

## **SPECIFICATIONS:**

TYPE: DRY DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE

TORQUE RATING: 6,000 LB-IN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE

RELEASE PRESSURE: 240 PSI INITIAL, 275 PSI FULL

MAXIMUM OPERATING PRESSURE:

3,000 PSI CONTINUOUS, 4,000 INTERMITTENT

MAXIMUM SPEED: 100 RPM

HIGH PERFORMANCE NON-METALLIC LINING MATERIAL:

APPROXIMATE WEIGHT: 22 LBS.

FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC CLAIMS PROPRIETARY RIGHTS TO INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL THE MATERIAL DISCLOSED IN THIS DOCUMENT. USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF AND MAY NOT BE REPRODUCED OR DISCLOSED

THIS DOCUMENT IS PROVIDED IN CONFIDENCE COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

I		North Mankato, Minnesota USA				
I	SCALE 1: 2	TITLE MINI-WHEEL BRAKE MW-250060-R				
I	DWN DMM 03/08/05	APVD PROD ENGRG DMM 02/23/06	SIZE	DRAWING NUMBER REY	V	
	X NO x7925–60	APVD ENGRG GAA 02/23/06	В	13-587-088 B		

FORM NO 89-500-276 06-0CT-2003