

NOTES:

1) FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY. 2) DIMENSIONS WILL VARY BETWEEN UNITS AND ARE FOR REFERENCE PURPOSES ONLY. MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES.

PERFORMANCE CHARACTERISTICS:

1) TEMPERATURE RANGE: FOR PETROLEUM BASE OILS AND WATER -45° TO $+220^{\circ}$ F. (NITRILE RUBBER).

- 2) WEATHER RESISTANT ADJUSTABLE PRESSURE SWITCH:

 PRESSURE SETTING: 290 INCREASING (MAX.).


 RELEASE AT 190 (MAX.).

 PROOF PRESSURE: 15,000 PSI.

 BURST PRESSURE: 25,000 PSI.

 - LEAD WIRE LENGTH: 16" APPROXIMATE. WIRE CODE: BLACK COMMON RED NORMALLY CLOSED
 - WHITE OR GREEN NORMALLY OPEN
- 3) SWITCH SPECIFICATIONS: - SINGLE POLE DOUBLE THROW.

RATED							
12 VDC	30 VDC	125 VAC	250 VAC				
3 AMPS INDUCTIVE	3 AMPS INDUCTIVE	5 AMPS	5 AMPS				
5 AMPS RESISTIVE	5 AMPS RESISTIVE						

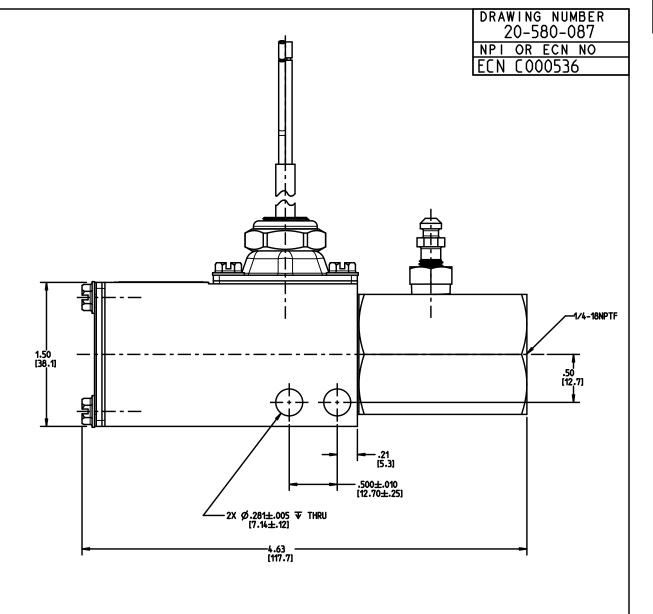

INCH [MILLIMETER]

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED



,	SCALE 1.000	TITLE	PRFSS	URE SWITCH	
DWN JRA		APVD PROD ENGRG	SIZE	DRAWING NUMBER	REV
١	X NO	APVD ENGRG	Α	20-580-087	F
	•	BSW 2014-10-13		CUSTOMER COPY	2 2