



PRODUCT BULLETIN

Pressure Differential Switch

DESCRIPTION

The MICO® Pressure Differential Switch is designed to monitor the differential pressure in split braking systems of large heavy duty machines. It is a replacement for automotive style switches that tend to give false warning when used in high pressure applications. The switch is typically connected into the front and rear portions of the service brakes. Should the pressure in one side of the split system be significantly lower than the other side, the switch can be used to warn the operator with an audible or visual alarm. Once activated, the switch will stay on until the pressure differential is released.

If continuous warning is desired a self-hold relay can be wired into the electrical system. The warning device will be de-energized when power is cut to the relay, such as turning off the ignition switch. The piston type switch is normally open and isolated (not internally grounded) and designed for use in mineral base hydraulic oil systems. The switch set point is factory set and non-adjustable for maximum tamper resistance.



BENEFITS

- Long switch life due to moisture resistant insulators
- Conductive properties of silver contacts are not significantly compromised by corrosion or oxidation
- Spring centering (auto reset) design reduces false warnings caused by temporary high pressure differentials

SPECIFICATIONS

Pressure differential (set point)..... 13.8 bar to 27.6 bar
(200 PSI to 400 PSI)


Maximum pressure 206.8 bar (3000 PSI)

Contact form single-pole, single-throw (SPST)
normally open, not internally grounded


Current rating..... 35 A @ 12 Vdc (resistive)
20 A @ 24 Vdc (resistive)

Fluid type mineral base hydraulic oil

Symbol



This document is intended to provide general information about MICO Products. MICO, Inc. has attempted to present accurate information about MICO Products in its catalogs, brochures, and other printed materials. MICO, Inc. is not responsible for errors, inaccuracies, or inconsistencies that may exist in any catalog, brochure, or other printed materials or any damages arising from or related to reliance on information in them. Materials and specifications for MICO Products set forth in catalogs, brochures, and other printed materials are subject to change without notice or obligation. Refer to www.mico.com for the most recent versions of our literature. If you have any questions concerning MICO Products, please contact MICO, Inc. All MICO Products and service are sold and provided subject to the MICO Warranty at www.mico.com in effect on the date of sale or supply.

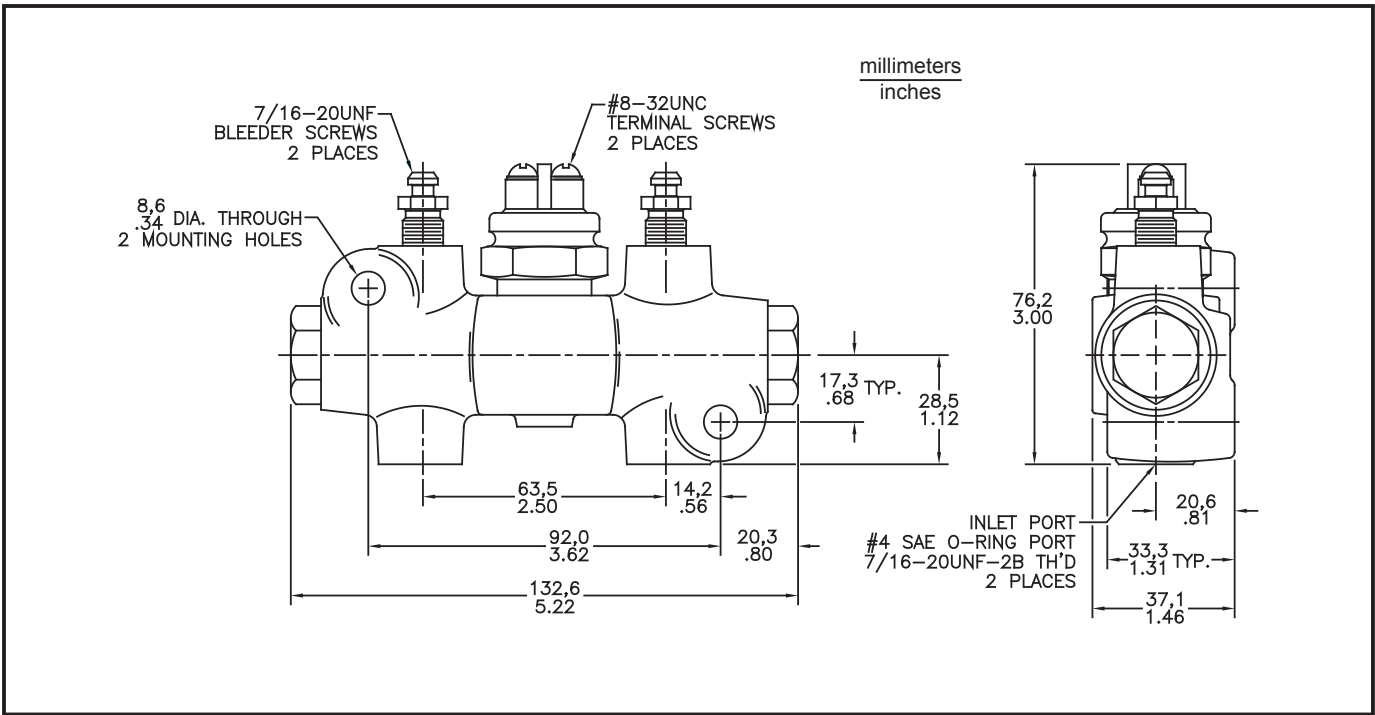

MICO is a trademark and registered trademark of MICO, Inc. MICO is registered in the U.S. Patent and Trademark Office as well as in Australia, Canada, Indonesia, Japan, Peoples Republic of China, South Korea, and the European Community.



MICO, Inc.

1911 Lee Boulevard
North Mankato, MN U.S.A. 56003-2507
Tel: +1 507 625 6426 Fax: +1 507 625 3212