



PRODUCT BULLETIN

Electrohydraulic Brake Valve EBV-S12 Series

DESCRIPTION

The MICO® Electrohydraulic Brake Valves, EBV-S12 series, are closed center full power valves used for modulating output pressures up to 200 bar (2900 PSI) in proportion to the input current. These valves in conjunction with electronic controls and properly sized accumulators provide hydraulic power for normal and emergency power-off braking for brake-by-wire (BBW) systems using spring-apply hydraulic release brakes.

BENEFITS

- Less cab noise because valve can be remotely mounted
- Improves reliability and performance by making maximum use of solenoid stroke and force
- Low valve leakage keeps accumulator sizes small for emergency power-off braking
- Eliminates the continuous flow and small orifices of a pilot valve by simplifying design
- Reduces the effects of friction and contamination with high force solenoid
- Manual override provides a way to mechanically open the valve if electrical power is lost
- Capable of three times the flow capacity of our EBV-S valves

FEATURES

- Various output pressure ranges available
- Capable of integrating multiple valves and accessories into a single housing
- Optimized specifically for the unique characteristics of full power spring-apply hydraulic release brake systems with large brakes
- Allows full pressure output with low input voltage, higher temperature operation, or continuous use as a result of low resistance coil

SPECIFICATIONS

Fluid compatibility Mineral base hydraulic oil only
(nitrile seals)

Output pressure (see chart on back page)


Leakage <48 cc/min @ 138 bar (2000 PSI)
and 32 cSt (150 SUS)

Rated pressure at (P) and (B) ports 207 bar (3000 PSI)




U.S. Patent Number: 6,802,330


Symbol

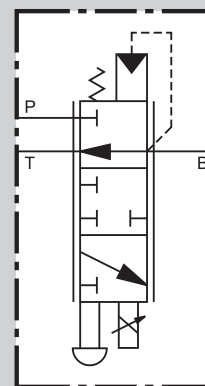

millimeters
inches

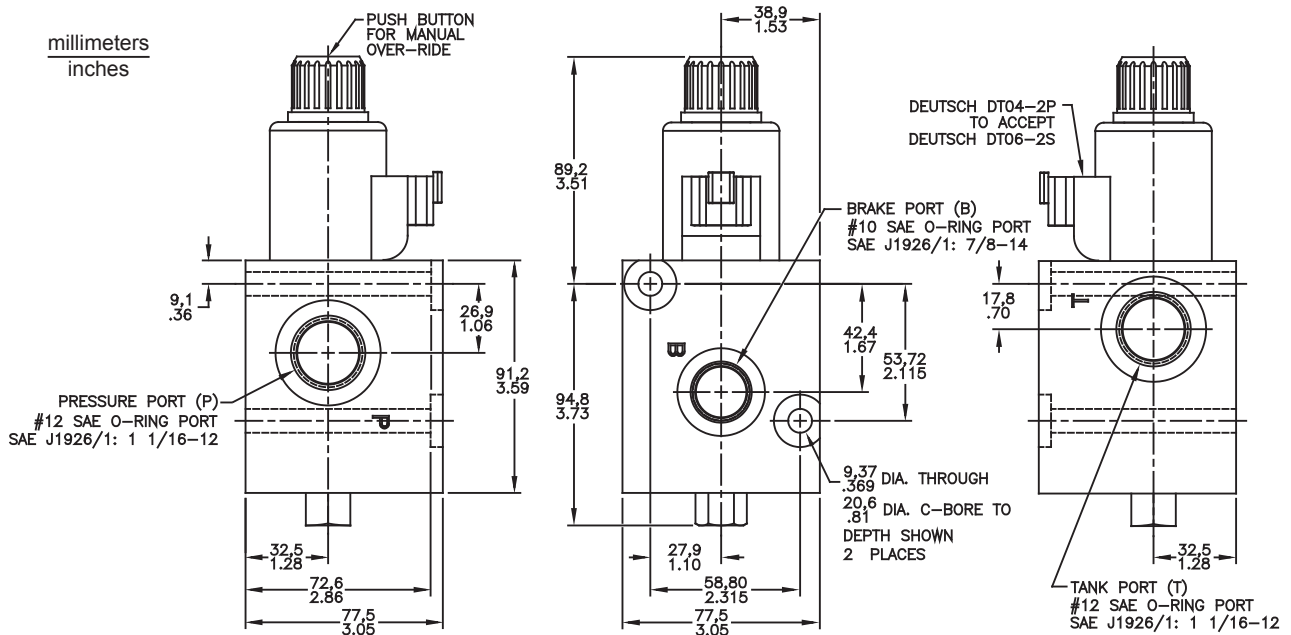

EBV-S12 Brake Pressure vs Current

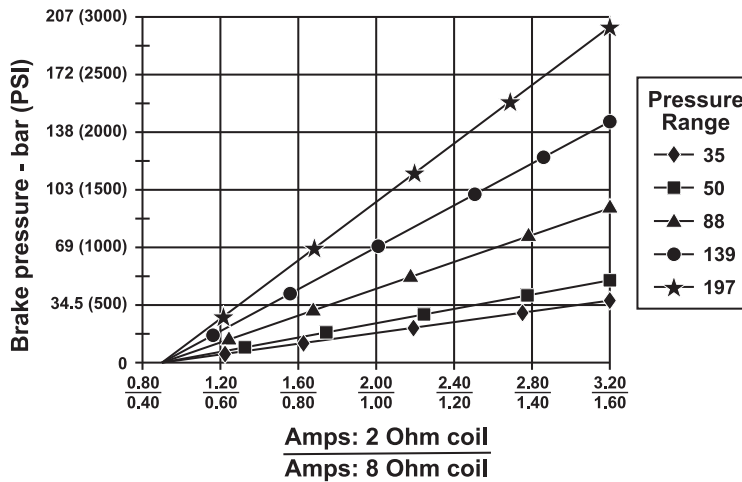

This document is intended to provide general information about MICO Products. MICO, Inc. has attempted to present accurate information about MICO Products in its catalogs, brochures, and other printed materials. MICO, Inc. is not responsible for errors, inaccuracies, or inconsistencies that may exist in any catalog brochure or other printed materials or any damages arising from or related to reliance on information in them. Materials and specifications for MICO Products set forth in catalogs, brochures, and other printed materials are subject to change without notice or obligation. Refer to www.mico.com for the most recent versions of our literature. If you have any questions concerning MICO Products, please contact MICO, Inc. All MICO Products and service are sold and provided subject to the MICO Warranty at www.mico.com in effect on the date of sale or supply.

MICO is a trademark and registered trademark of MICO, Inc. MICO is registered in the U.S. Patent and Trademark Office as well as in Australia, Canada, Indonesia, Japan, Peoples Republic of China, South Korea, and the European Community.



MICO, Inc.

1911 Lee Boulevard

North Mankato, MN U.S.A. 56003-2507

Tel: +1 507 625 6426 Fax: +1 507 625 3212